


QUICK LOCKS

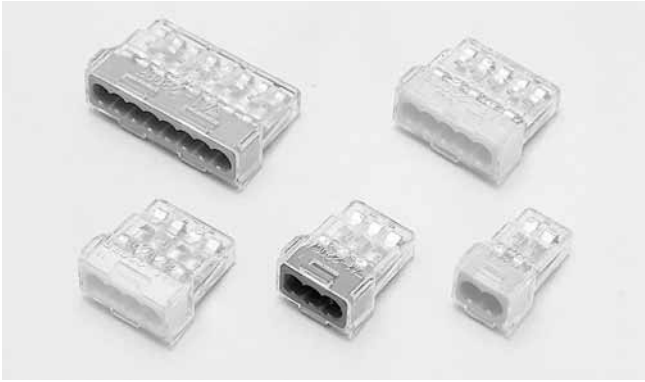

Quick Lock for solid wires.

FEATURES Reliable, double contacts.
Transparent housing enables to see if wire contacts.

STANDARDS JIS C2813

MATERIALS SPRING ...STAINLESS STEEL
CONNECTOR CONTACTS...OXYGEN FREE COPPER
HOUSING...POLYCARBONATE






RATING 20A 300V

TEMPERATURE 125 °C



FOR SAFETY USE

Please observe instructions to prevent over heating and possible fire.

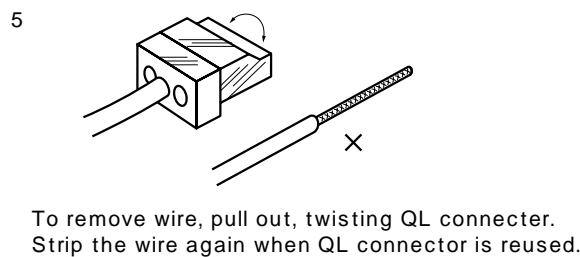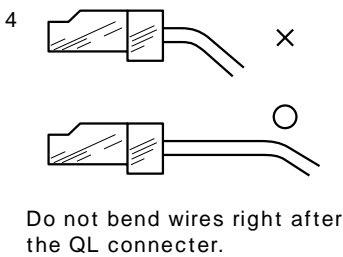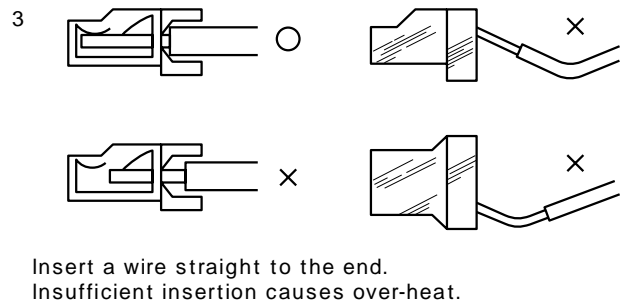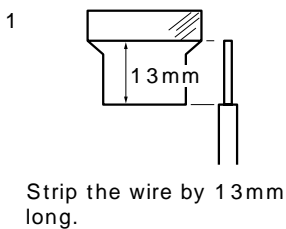

| PART NUMBER | POLE | DIMENSIONS (mm) | | | RATINGS | STD QTY/BOX | APPLIED WIRE | COLOR |
|-------------|------|-------------------|-------|--------|-------------|--|--|--------|
| | | LENGTH | WIDTH | HEIGHT | | | | |
| QL 2 | 2 | 20.3 | 11.5 | 8.9 | 20A 300V | 50pcs×7 50pcs×5 50pcs×5 50pcs×4 20pcs×6 20pcs×6 | COPPER/ SOLID WIRE 1.6mm } 2.0mm | RED |
| QL 3 | 3 | | 15.2 | | | | | BLUE |
| QL 4 | 4 | | 18.9 | | | | | YELLOW |
| QL 5 | 5 | | 22.6 | | | | | ORANGE |
| QL 6 | 6 | | 26.3 | | | | | PURPLE |
| QL 8 | 8 | | 33.7 | | | | | GREEN |